


BFM Series (Bag size 2)

Flow Multi-Bags Filter Housing

- Material : SUS304 , SUS316 , SUS316L
- Porting : 1" ~ 12" –PT , Flange and other special sizes.
- O ring : EPDM , Viton , PTFE
- Surface : Acid-washing, Electrolyze and others
- Accessory : Filter bag , pressing , basket , melat float ball
- Design pressure : 15kg/cm²
- Operating pressure :10kg/cm²
- Design temperature : 100⁰C
- Op. temperature : 75⁰C



No	Description
1	Screw
2	Turntable
3	Hanger
4	Port vent
5	Top cover
6	Top cover flange
7	Eye nue socket
8	O’ring
9	Shell flange
10	Eye bolt socket
11	Spindle
12	Eye bolt
13	Spacer
14	Eye nut
15	Shell
16	Basket
17	Head
18	Port drain
19	Support
20	Port (in/outlet)
21	Filter bag plate

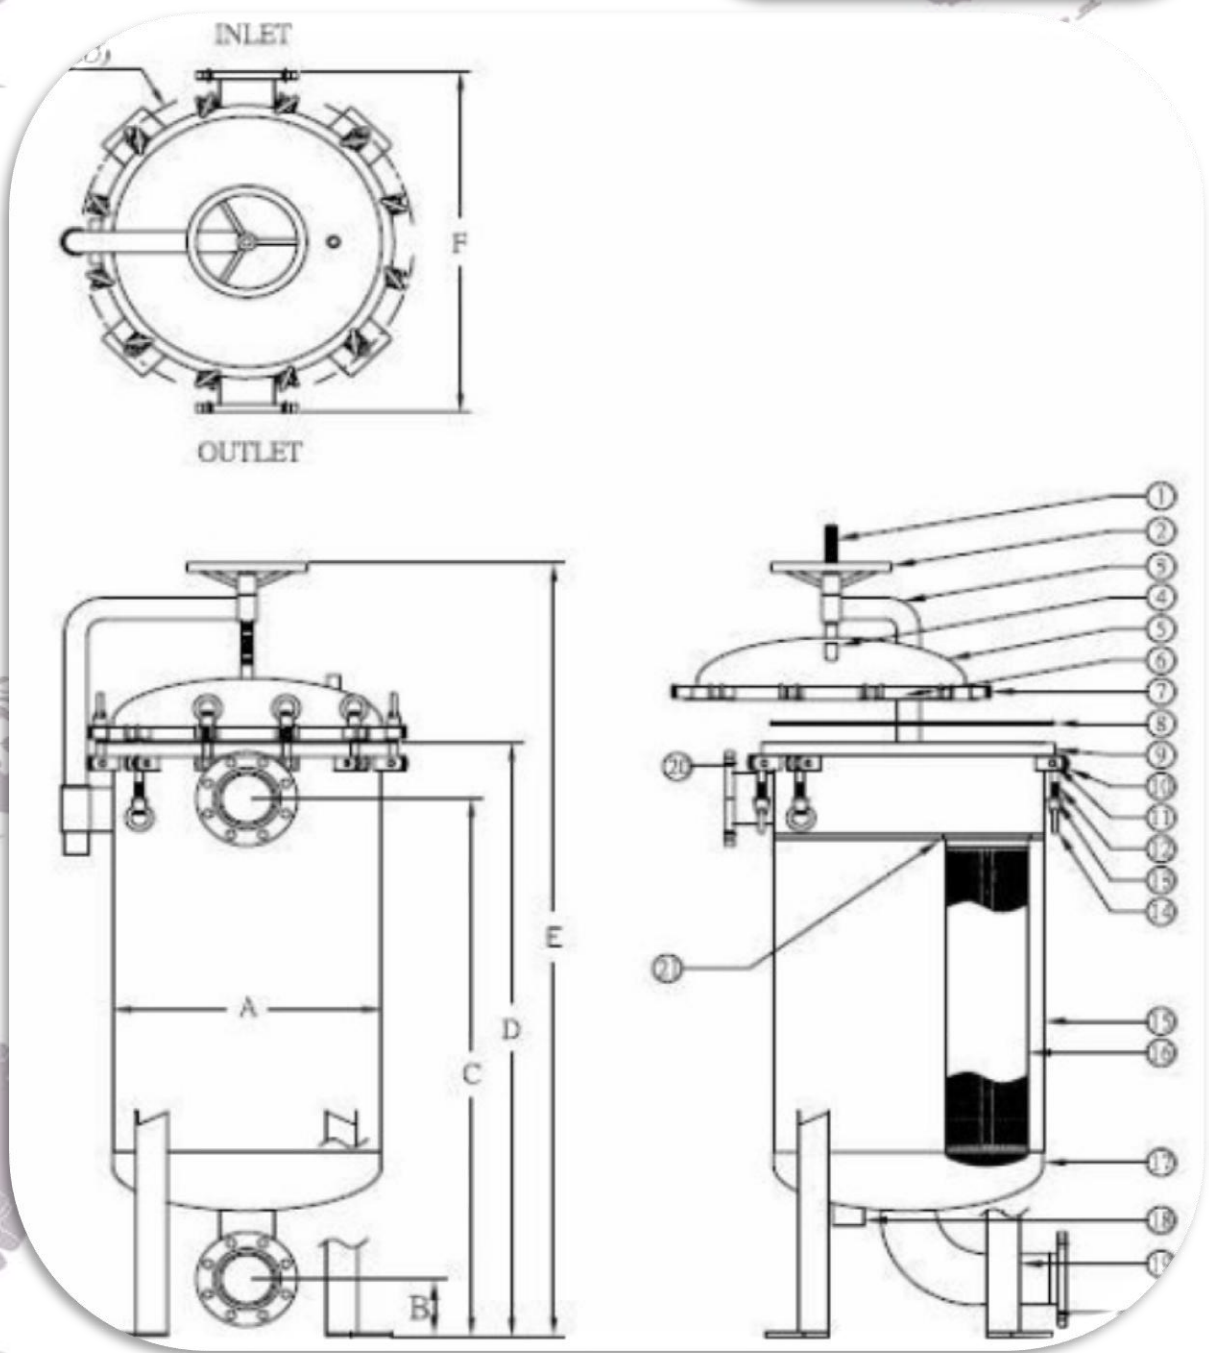

Model	No. bags	A m/m	B m/m	C m/m	D m/m	E m/m	F m/m	G/PCD) m/m	m ³ hr	Weight	Volume
400-3F	2	Φ406	108	1088	1273	1643	606	Φ516	90	97kg	116L
400-4F	2	Φ406	127	1159	1369	1739	606	Φ516	90	102kg	117L
600-3F	3	Φ486	108	1098	1283	1663	686	Φ596	135	125kg	188L
600-4F	3	Φ486	127	1169	1379	1759	686	Φ596	135	130kg	189L
800-3F	4	Φ508	108	1103	1288	1673	708	Φ618	180	161kg	244L
800-4F	4	Φ508	127	1174	1384	1769	708	Φ618	180	169kg	245L
800-6F	4	Φ508	152	1300	1535	1920	708	Φ618	180	206kg	279L
1000-3F	5	Φ560	108	1118	1303	1703	760	Φ704	225	160kg	244L
1000-4F	5	Φ560	127	1189	1399	1799	760	Φ704	225	165kg	278L
1000-6F	5	Φ560	152	1315	1550	1950	760	Φ704	225	206kg	246L
1200-3F	6	Φ600	108	1123	1308	1713	800	Φ744	270	198kg	277L
1200-4F	6	Φ600	127	1194	1404	1809	800	Φ744	270	202kg	278L
1200-6F	6	Φ600	152	1320	1555	1960	800	Φ744	270	206kg	279L
1400-3F	7	Φ600	108	1123	1308	1713	800	Φ744	315	430kg	488L
1400-4F	7	Φ600	127	1194	1404	1809	800	Φ744	315	440kg	489L
1400-6F	7	Φ600	152	1320	1555	1960	800	Φ744	315	450kg	491L
1400-8F	7	Φ600	184	1454	1729	2134	800	Φ744	315	440kg	493L
1600-4F	7	Φ600	127	1194	1404	1809	800	Φ744	315	450kg	489L
1600-6F	8	Φ650	152	1325	1560	1970	850	Φ800	360	450kg	491L
1600-8F	8	Φ650	184	1459	1734	2144	850	Φ800	360	460kg	493L
1800-6F	9	Φ762	152	1365	1600	2200	962	Φ962	405	520kg	564L
1800-8F	9	Φ762	184	1499	1774	2374	962	Φ962	405	530kg	566L
2000-6F	10	Φ762	152	1365	1600	2200	962	Φ962	450	590kg	662L
2000-8F	10	Φ762	184	1499	1774	2374	962	Φ962	450	600kg	664L
2000-10F	10	Φ762	216	1632	1947	2547	962	Φ962	450	715kg	854L
2400-8F	12	Φ813	184	1532	1807	2437	1064	Φ1064	540	725kg	852L
2400-10F	12	Φ813	216	1662	1977	2607	1064	Φ1064	540	735kg	854L

