


DL- Series (Cartridge size 30",40")

Flow Multi-Cartridge Filter Housing

- Material : SUS304 , SUS316 , SUS316L
Porting : 1/2" ~ 3" -PT , Flange and other special sizes.
O ring : EPDM , Viton , PTFE
Surface : Acid-washing Electrolyze and others
Accessory : Cartridge , Partition
Cartridge specification: 10" , 20" , 30" , 40"
Design pressure : 10kg/cm²
Operating pressure : 7kg/cm²
Design temperature : 100°C
Op. temperature : 75°C
Also accept orders for special type of filter housing.



No	Description
1	Screw
2	Turntable
3	Hanger
4	Port vent
5	Top cover
6	Top cover flange
7	Eye nue socket
8	O'ring
9	Shell flange
10	Eye bolt socket
11	Spindle
12	Eye bolt
13	Spacer
14	Eye nut
15	Shell
16	Port (in/outlet)
17	Port (in/inlet)
18	Port drain
19	Nut
20	Cartridge support plate
21	Cartridge bowl
22	Head
23	Support
24	Port drain
25	Nut
26	Cartridge sgueeze plate
27	Springs
28	partition
29	Screw stay
30	Cartridge aligningrod

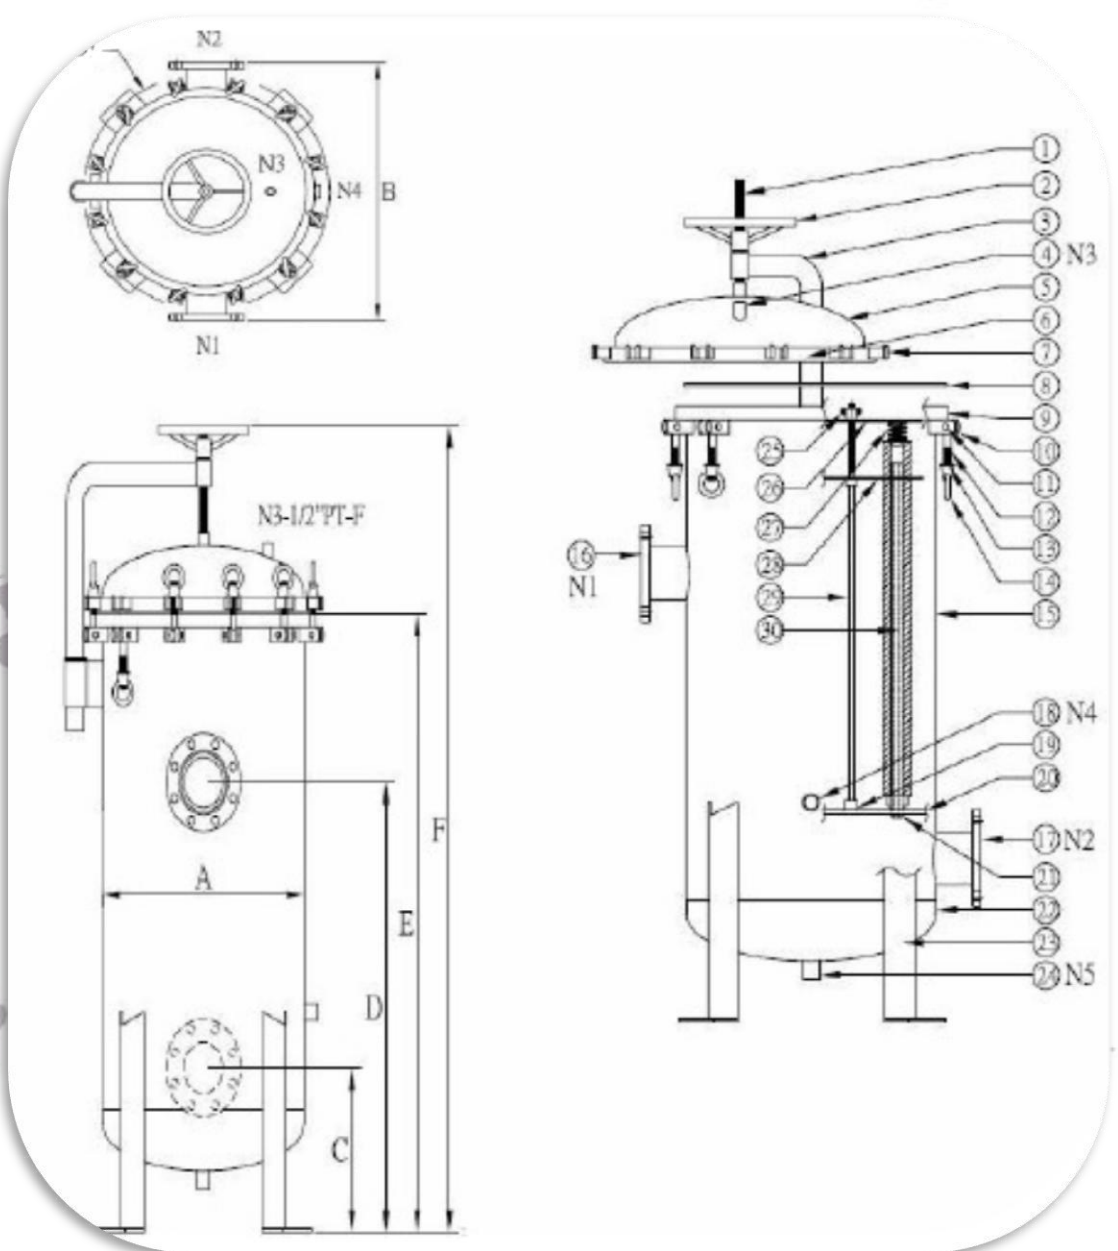

														
Model	H	N1/N2	N4/N5	A m/m	B m/m	C m/m	D m/m	E m/m	F m/m	G/PCD) m/m	m ³ hr	GPM	W. Kg	V. L
8~12	30"	2"-4"F	1" FPT	Φ300	500	350	700	1320	1690	Φ410	24~36	120~180	77	89
	40"		1" FPT	Φ300	500	350	700	1570	1940	Φ410	32~48	160~240	85	107
13~20	30"	2"-4"F	1" FPT	Φ406	606	350	700	1320	1700	Φ516	39~60	195~300	105	165
	40"		1" FPT	Φ406	606	350	700	1570	1950	Φ516	52~80	260~400	125	198
21~28	30"	3"-4"F	1" FPT	Φ486	686	350	700	1320	1705	Φ596	63~84	315~420	120	239
	40"		1" FPT	Φ486	686	350	700	1570	1955	Φ596	84~112	420~560	145	286
29~36	30"	3"-4"F	1" FPT	Φ560	760	350	700	1320	1730	Φ704	87~108	435~540	190	327
	40"	4"-6"F	1" FPT	Φ560	760	400	800	1630	2040	Φ704	116~138	580~720	225	389
37~46	30"	4"-6"F	1" FPT	Φ600	800	400	800	1380	1790	Φ744	111~138	555~690	200	401
	40"		1" FPT	Φ600	800	400	800	1630	2050	Φ744	148~184	740~920	230	460
47~56	30"	4"-6"F	1" FPT	Φ650	850	450	850	1430	1885	Φ800	141~168	705~840	242	484
	40"		1" FPT	Φ650	850	450	850	1680	2135	Φ800	188~224	940~1120	280	567
57~81	30"	4"-6"F	1" FPT	Φ762	962	500	950	1480	2130	Φ960	171~243	855~1215	365	665
	40"		1" FPT	Φ762	962	500	950	1730	2380	Φ960	228~324	1140~1620	408	802
82~95	30"	6"-8"F	1 ^{1/2} " FPT	Φ900	1100	550	1000	1630	2330	Φ1100	246~285	1230~1425	687	1042
	40"		1 ^{1/2} " FPT	Φ900	1100	550	1000	1880	2580	Φ1100	328~380	1640~1900	715	1201
96~135	30"	8"-10"F	2" FPT	Φ1000	1200	600	1100	1710	2420	Φ1200	288~405	1440~2025	791	1350
	40"		2" FPT	Φ1000	1200	600	1100	1960	2670	Φ1200	384~540	1920~2700	832	1546
136~155	30"	10"-12"F	2" FPT	Φ1100	1300	650	1250	1760	2475	Φ1300	408~465	2040~2325	1046	1580
	40"		2" FPT	Φ1100	1300	650	1250	2010	2725	Φ1300	544~620	2720~3100	1102	1817
156~173	30"	10"-12"F	2" FPT	Φ1200	1400	650	1250	1760	2480	Φ1400	468~692	2340~2595	1188	1955
	40"		2" FPT	Φ1200	1400	650	1250	2010	2730	Φ1400	624~692	3120~3460	1247	2238

